

GREAT WHITE GW20 | THRU-HULL INTERCHANGEABLE

Signature
 SERIES



GREAT WHITE GW20 Underwater LED Light produces 15,000 fixture lumens and has almost unlimited mounting options thanks to a ultra low profile bezel (4mm) and internal driver system. Thru Hull mounting offers secure fixing with the additional benefit of a removable LED cartridge to eliminate the need for hauling.


Suitable for transom and side mounting on all hull types.

Simple installation thanks to our inbuilt driver technology, just two wires to connect. Reverse polarity protection with active thermal control.

- RINA Type approval
- 2-Year Warranty

SPECIFICATION	GREAT WHITE GW20 SINGLE COLOUR ● ● ●
Mounting Type	Thru-Hull Interchangeable
Hole cut out size	101mm
Maximum Lamp Lumens	17000
Fixture Lumens	15000
Max Wattage	122 Watts
Typical Life Expectancy	50,000 hours
Voltage	24v
Power Draw	5.1 Amp
Protection	Over / Under Voltage, Over Current, Reverse Polarity protection, Thermal protection.
Fixture Profile	4mm
Fixture Diameter	140mm
Fixture Length	170mm
Lens Type	Optical grade 8mm Borosilicate glass with Guard X coating
Fixture Material	AB2 Bronze with aluminium light engine cartridge
Beam Angle	65 Degree
Warranty	2 year
Type Approval	RINA IEC 60529
Available Colours	Diamond White 6500k Cobalt Blue
Suitable Use	Below the water-line only
Spacing	1.2 - 2mtr
Driver Type	Integral
Total weight	5.2 kg
Attached cable length	2 mtr Over-moulded
Included in box	In-line fuse holder & rated fuse, Gel connector, Inline Crimps, Heat shrink, Fixing Screws, Template and installation instructions
ACCESSORIES	(OPTIONAL)
Junction Box	4 Way IP68 Wiring Junction Box
Delrin Sleeve	Isolating kit for steel, aluminium and carbon fibre hulls
220/110v Power Supply	Power supply 24v
BL-Switch	Panel mount illuminated switch & wiring loom
I.Y.S Lighting Control	Control via MFD screen or mobile device



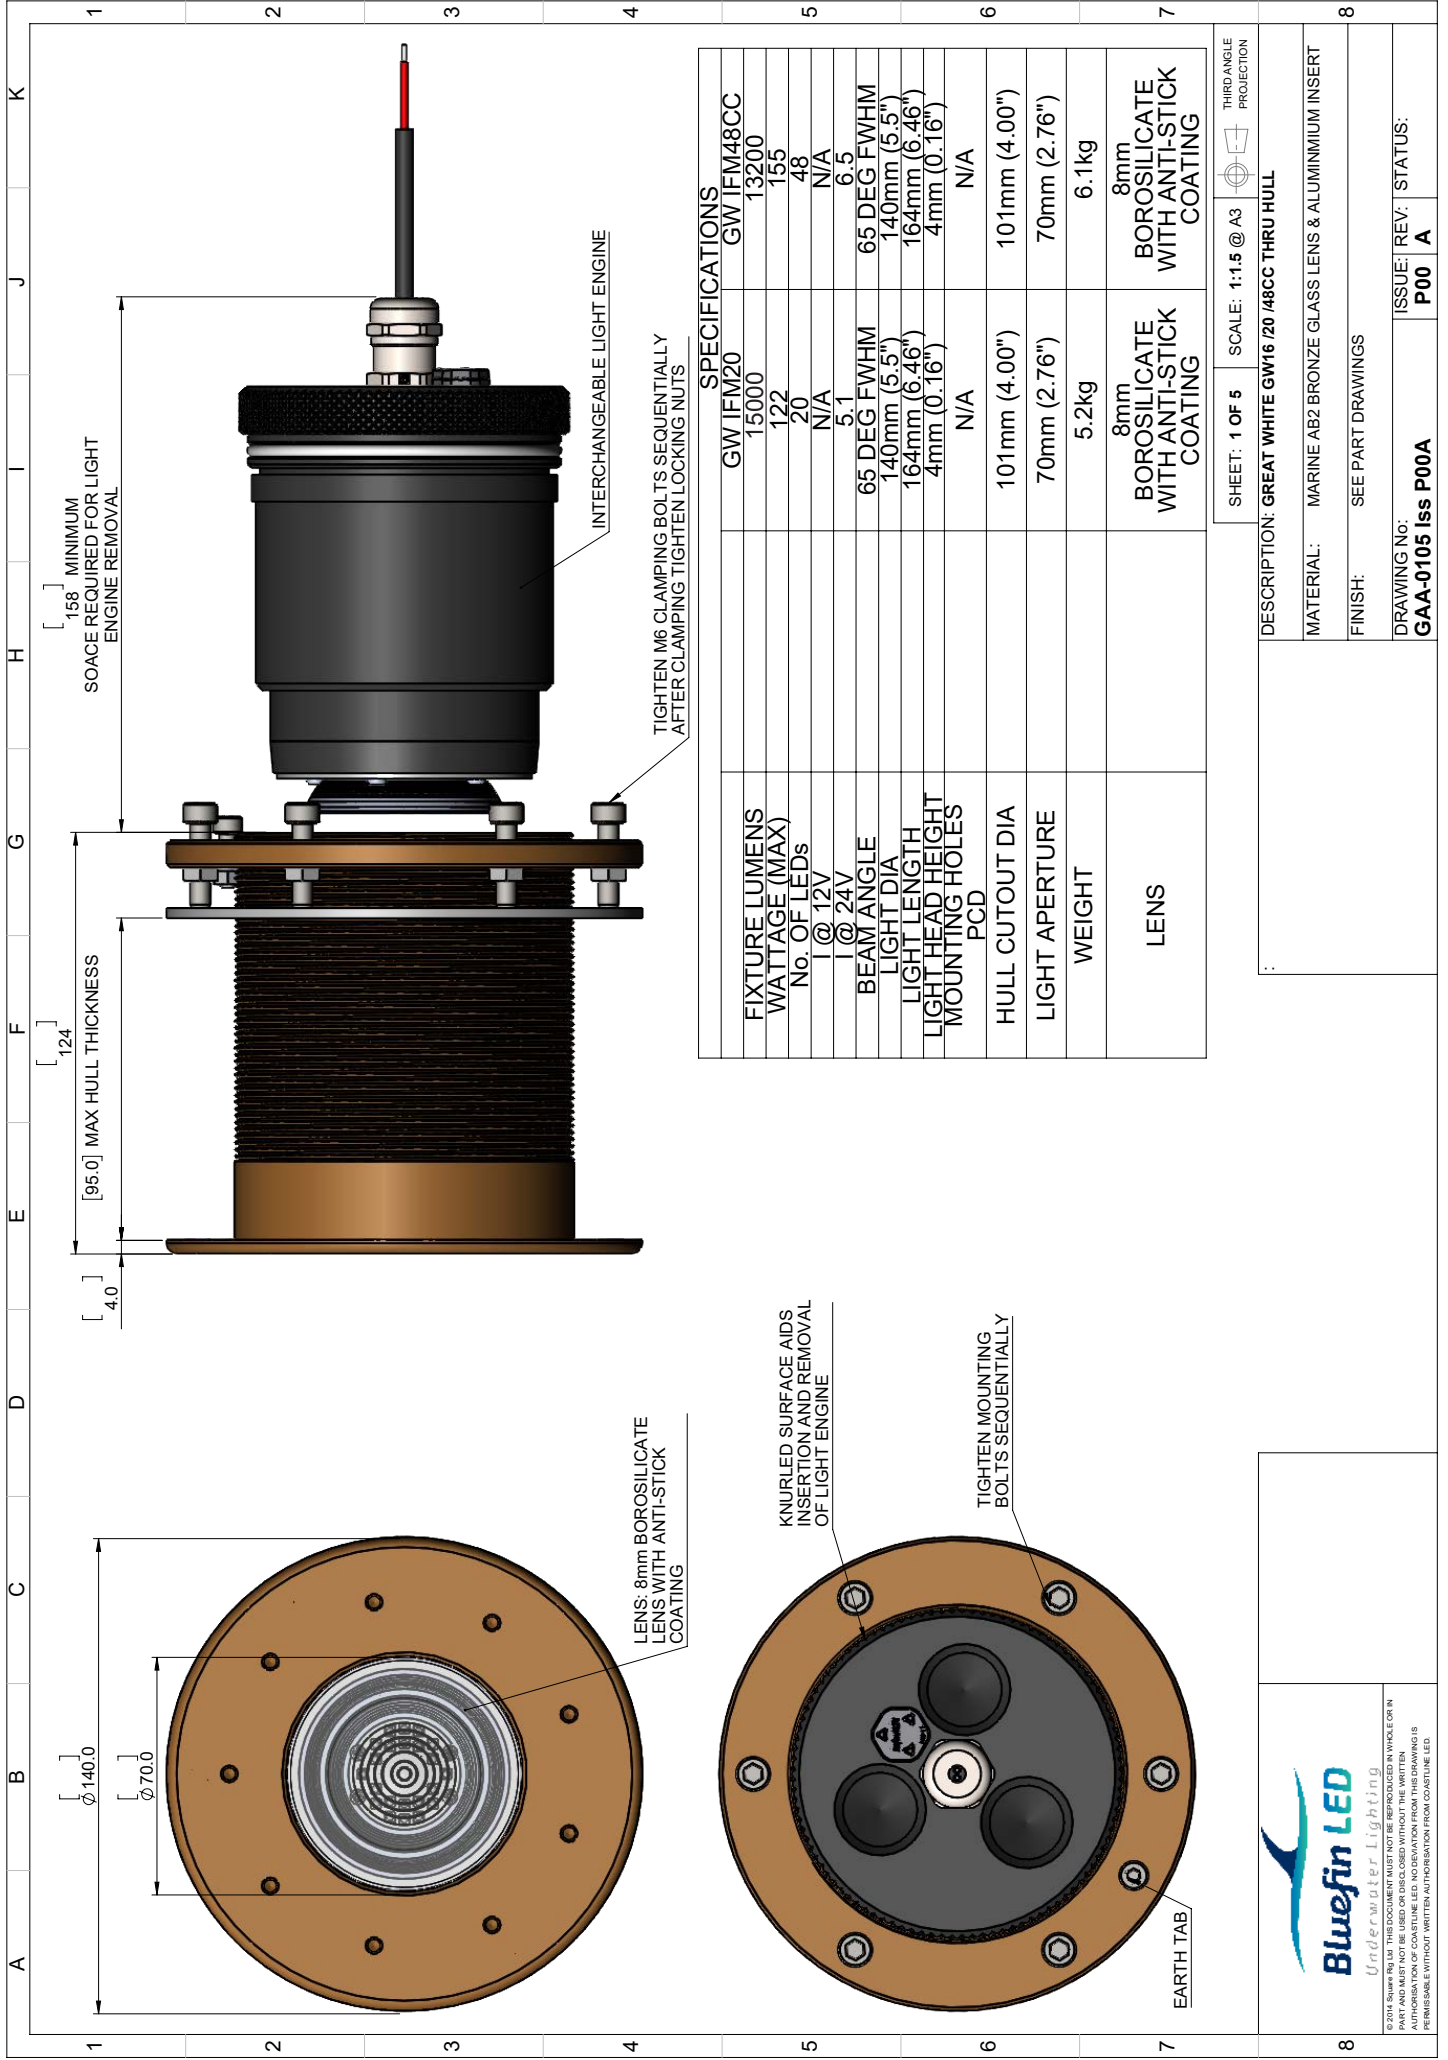

SPECIFICATIONS	
FIXTURE LUMENS	GW IFM20 15000
WATTAGE (MAX)	GW IFM48CC 13200
No. OF LEDS	122
1 @ 12V	20
1 @ 24V	N/A
BEAM ANGLE	5.1
LIGHT DIA	65 DEG FWHM
LIGHT LENGTH	140mm (5.5")
LIGHT HEAD HEIGHT	164mm (6.46")
MOUNTING HOLES PCD	4mm (0.16")
HULL CUTOUT DIA	N/A
LIGHT APERTURE	101mm (4.00")
WEIGHT	70mm (2.76")
LENS	5.2kg 6.1kg
	8mm BOROSILICATE WITH ANTI-STICK COATING
	8mm BOROSILICATE WITH ANTI-STICK COATING

SHEET: 1 OF 5 SCALE: 1:1.5 @ A3 THIRD ANGLE PROJECTION

DESCRIPTION: GREAT WHITE GW16 /20 /48CC THRU HULL

MATERIAL: MARINE AB2 BRONZE GLASS LENS & ALUMINIUM INSERT

FINISH: SEE PART DRAWINGS

DRAWING NO: **GAA-0105 Iss P00A** ISSUE/ REV: STATUS: **P00 A**

Bluefin LED
Underwater Lighting

PLEASE CONTACT US AT THE FOLLOWING ADDRESS FOR ANY INFORMATION REGARDING THIS PRODUCT OR SERVICE OR FOR ANY PART AND MAY NOT BE USED OR DISCLOSED WITHOUT THE WRITTEN AUTHORIZATION OF COASTLINE LED. NO DEVIATION FROM THIS DRAWING IS PERMISSIBLE WITHOUT WRITTEN AUTHORIZATION FROM COASTLINE LED.